



/ EVCB-LB-3AC-10 / EVCB-3AC-10



# SMA EV Charger Business

Charging infrastructure for e-mobility in the commercial sector



## Flexible use

- For new and existing PV systems
- As single device with two charging points or in parks with several charging points

## Fast and easy to use

- Charging with up to 2 x 22 kW per charger
- Integrated RFID card reader
- Can be easily integrated into your SMA Energy System

## Ease of mind


- Included 5 years of SMA eMobility Portal
- Integrated dynamic load control
- Integrated direct current failure monitoring

## Sustainable

- Produced in Germany
- CO<sub>2</sub>-neutral mobility
- Dynamic charging load control is integrated in the charger

**With the new SMA EV Charger Business, a commercial charging infrastructure for single point charging stations or parks with several charging points can be quickly and easily implemented.**

Each charger features two convenient charging points for electric vehicles including charging cable and type-2 plugs or charging sockets. As part of SMA Energy System Business, SMA EV Charger Business is a fully integrated e-mobility solution that also enables refueling with solar power and can be expanded with SMA's commercial storage system anytime. Thanks to RFID and OCPP interface, the charger can be flexibly integrated into various charging backends and billing systems. Thanks to the flexible concept, SMA EV Charger Business can either be mounted on the wall or installed as a free-standing charging station.

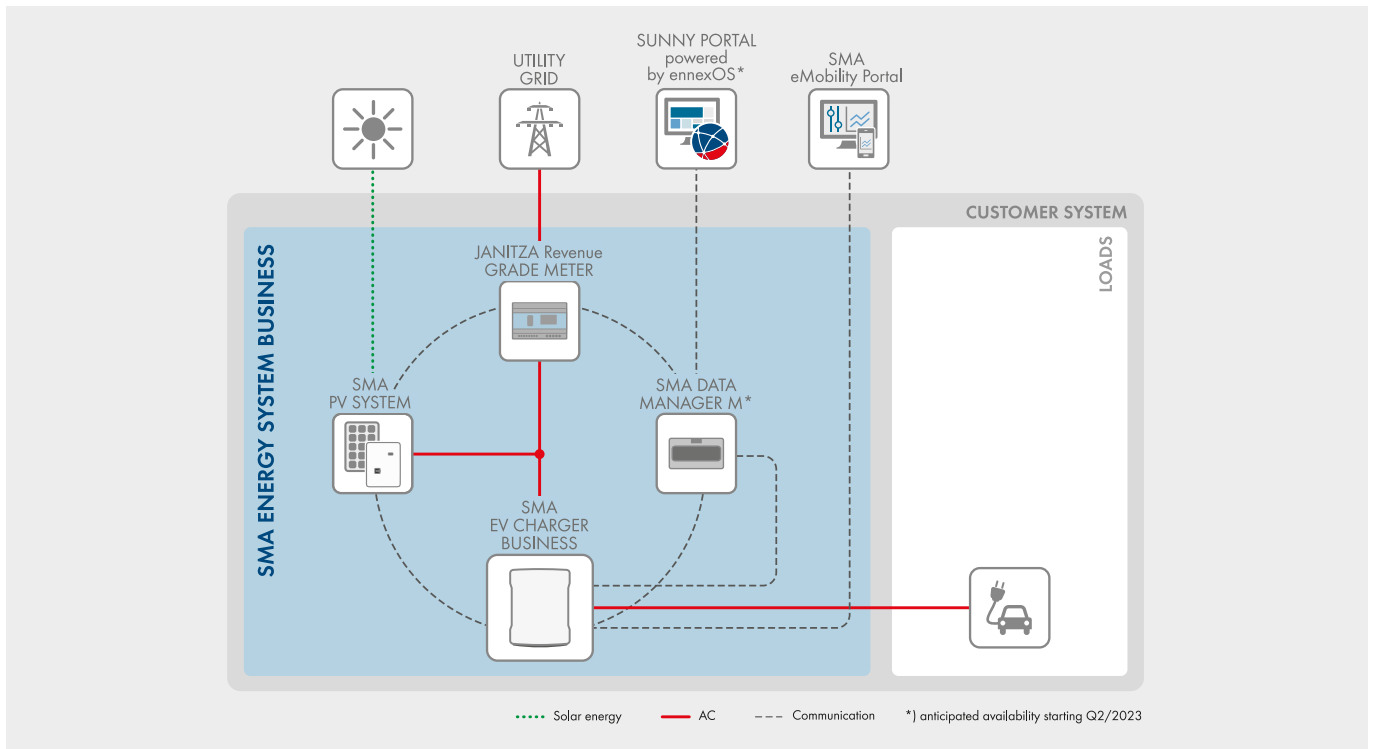

Technical data	SMA EV Charger Business with charging socket	SMA EV Charger Business with charging cable
<b>Inputs and outputs (AC)</b>		
Charging power per charging point	up to 22 kW	
Nominal voltage	230 VAC / 400 VAC	
Nominal frequency	50 Hz	
Nominal current per charging point	max. 32 A	
Number and type of charging points	2 x type-2 charging socket	2 x type-2 charging cable (7.5 m)
Operating mode for charging processes	Mode 3 (charging with alternating current) according to IEC 61851-1	
<b>Communication</b>		
Interface	Ethernet RJ-45 (LAN)	
OCPP	OCPP 1.6 JSON	
PLC (ISO 15118)	●	
EEBUS	●	
<b>Protective devices</b>		
DC residual current detection per charging point	6 mA	
Residual-current device per charging point	4-pole 40 / 0.03 A type A	
Miniature circuit breaker	ext. necessary, per cable max. C 32 A, 3-pole	
<b>Ambient conditions and operation</b>		
Operating temperature range	-25 °C to +40 °C (-13 °F to +104 °F)	
Degree of protection (according to IEC 60529) / impact resistance	IP54 / IK08	
Protection class (according to IEC 62103) / overvoltage category	I / III	
Maximum permissible value for relative humidity	5% to 90%	
Altitude above MSL	0 m to 2000 m	
<b>General Data</b>		
Dimensions (W / H / D)	409 mm / 490 mm / 176 mm	430 mm / 490 mm / 176 mm
Weight	13.5 kg	21 kg
Connection cross-section	with NYY-J max. 5 x 10 mm <sup>2</sup>	
Grid configurations	TN, TN-S, TT	
Display per charging point	LED, LCD indication (meter)	
<b>Features / accessories</b>		
Integrated charging cable	—	7.5 m
Integrated energy meter	MID-compatible	
Dynamic charging load control	●	
Authorization	RFID	
Warranty	2 years	
Certificates and approvals	IEC 61851-1:2019	
System compatibility	SMA eMobility Portal, SMA Data Manager M*	
Stele	○	
Foundation	○	
RFID cards (MIFARE DESFire)	●	
Type designation / material number	EVCB-LB-3AC-10 / 202576-00.01	EVCB-3AC-10 / 202559-00.01

● Standard equipment ○ Optional – Not available Data at nominal conditions Last revised: 02 / 2023

\*) anticipated availability starting Q2/2023